


Installation guide

Cold Water Filter

Before installing read this guide first




Quooker®


Contents of the pack

1. Sediment filter
2. AC + KDF filter
3. Adapter head


1

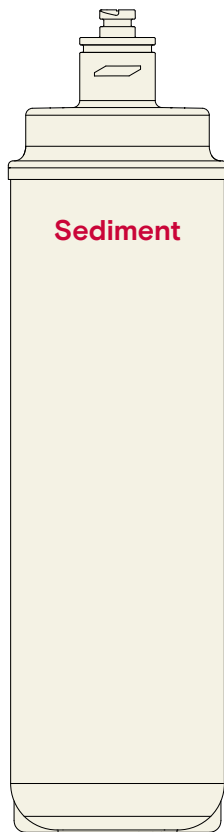


2

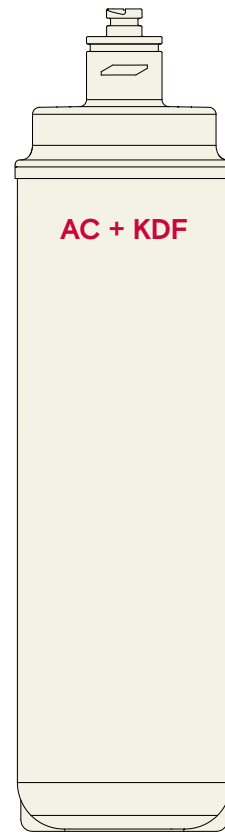

3

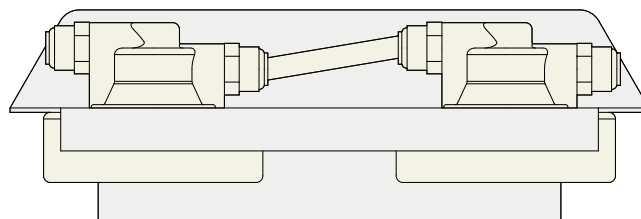

Cartridge installation

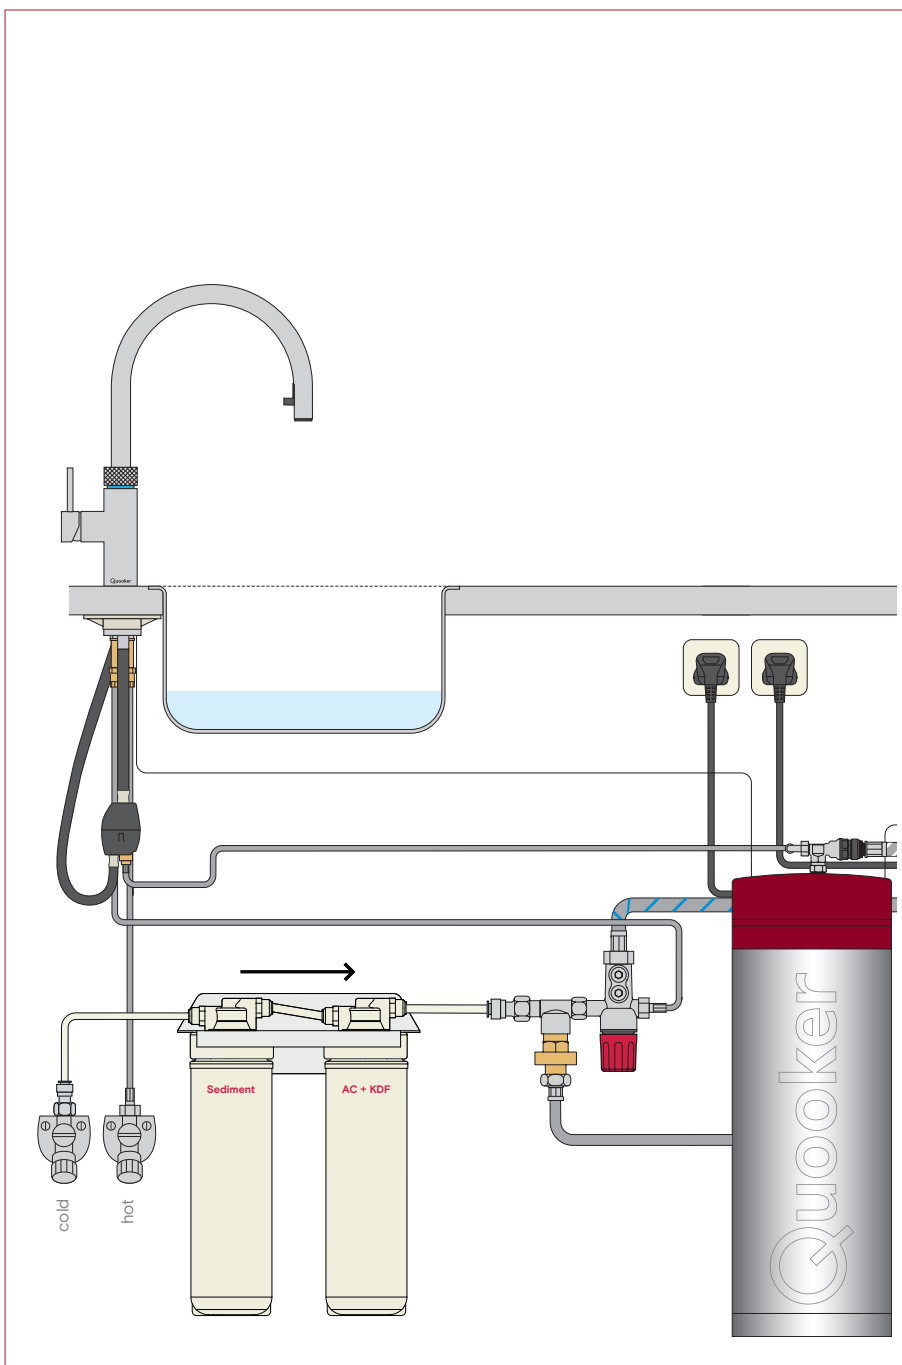

1. Unpacking the filter and adapter head

- Take the filter cartridge out and remove the hygienic cap.


2. Assembling to the adapter head between the reservoir and cold water valve

- Observe the correct direction of flow.
- Assemble adapter head onto the wall.

3. Inserting the filter cartridges

- Turn the filters clockwise in the adapter head to lock.
- Flush new water filters for at least 10 minutes prior to use.
- Use provided push-fittings and pipes to connect water supply and Quooker tank.

Replacing the filter cartridges

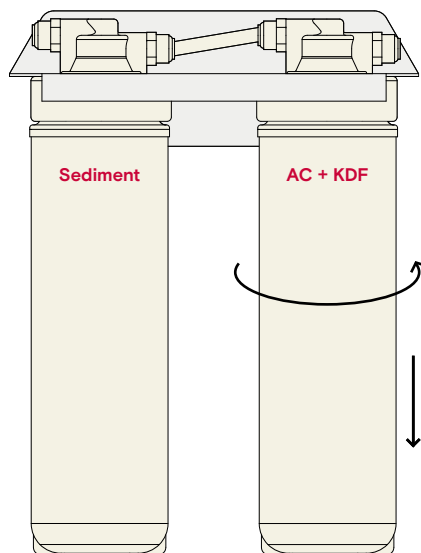


Replacing the filter cartridges

- Close the cold water valve.
- Turn the filter anticlockwise out from the adapter head to remove a filter.
- Take the new filter out of the package and remove the hygienic cap.
- Turn the filter clockwise in the adapter head to instal a filter.

Note:

- The left filter is a sediment filter.
- The right filter is an AC + KDF filter.
- The positioning between the filters may not change

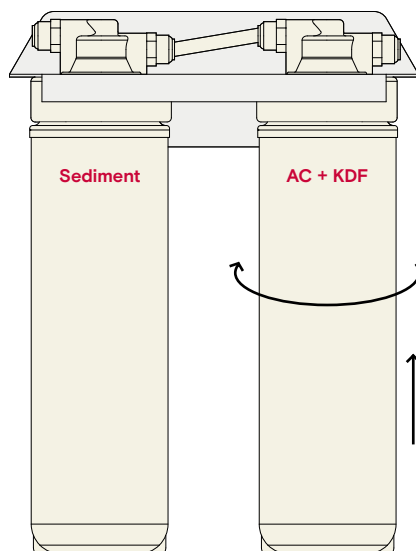

Quooker®

Quooker Emirates LLC
15A Street, Showroom 17
Al Joud Center
Al Quoz, Dubai (UAE)
+971 4 330 3063
info@quooker.ae
www.quooker.ae